

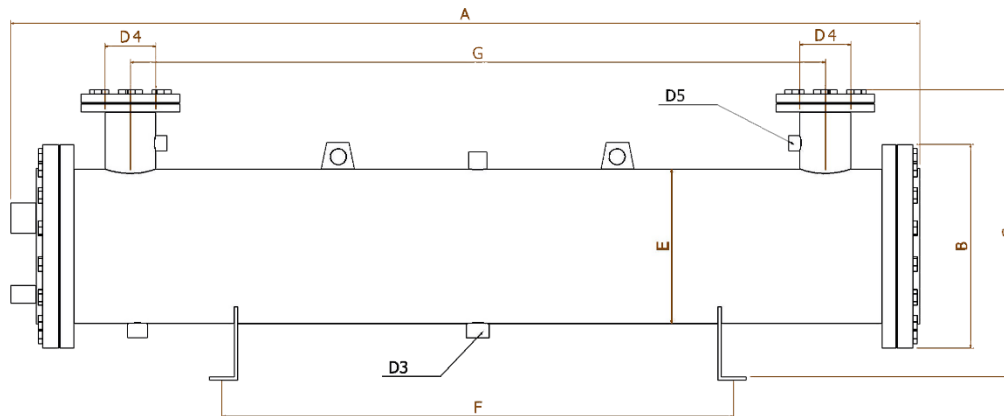



MODEL	KW	A	B	C	E	F	G	D1	D2	D3	D4	D5	Q	Vm
		cm	cm	cm	mm	cm	cm	inch	inch	inch	inch	inch	M3/h	lit
EW5T	13	110	30	40	220	60	75	5/8	1 1/8	1/2	1 1/2	3*1/2	2.9	21
EW7T	23	110	30	40	220	60	75	5/8	1 1/8	1/2	1 1/2	3*1/2	4	19
EW10T	30	110	30	40	220	60	75	7/8	1 1/8	1/2	1 1/2	3*1/2	5.4	16
EW15T	48	170	30	40	220	90	124	1 1/8	1 5/8	3/4	2	4*1/2	8.3	25
EW20T	60	170	36	55	270	90	124	1 1/8	2 1/8	3/4	2 1/2	4*1/2	11	48
EW25T	75	170	36	55	270	90	124	1 1/8	2 1/8	3/4	2 1/2	4*1/2	13.3	40
EW30T	88	220	36	55	270	125	174	1 1/8	2 1/8	3/4	3	4*1/2	16	58
EW35T	112	220	36	55	270	125	174	1 3/8	2 1/8	3/4	3	4*1/2	19	52
EW40T	126	220	41	60	320	125	174	1 3/8	2 1/8	1	3	4*1/2	21.6	93
EW50T	150	220	41	60	320	125	174	1 3/8	2 1/8	1	3	4*1/2	29	80
EW60T	181	220	41	60	360	150	274	1 3/8	2 5/8	1	4	5*1/2	32.4	143
EW70T	210	220	41	60	406	150	274	1 3/8	2 5/8	1	4	5*1/2	38.2	130
EW80T	252	220	46	60	406	150	270	1 5/8	3 1/8	1	4	5*1/2	43	162
EW90T	272	320	46	60	360	150	270	1 5/8	3 1/8	1	4	5*1/2	46.8	150



Water.T	12 °C	7 °C
Fouling	0.000043 m2k/w	
velocity	1.3 ~ 3 m/s	
Testing pressure	290 psi	20 bar
Vm	shell volume	حجم خالص پوسته
Q	Water Flow rate	دبی آب
D5	connections	اتصالات

MODEL	KW	A	B	C	E	F	G	D1	D2	D3	D4	D5	Q	Vm
		cm	cm	cm	mm	cm	cm	inch	inch	inch	inch	inch	M3/h	lit
EW100T	310	320	51	60	406	150	270	1 5/8	3 1/8	1 1/2	5	1&1/2	54	220
EW110T	341	320	51	60	406	150	270	1 5/8	3 1/8	1 1/2	5	1&1/2	61	210
EW125T	370	320	51	60	406	150	270	2 1/8	4	1 1/2	5	1&1/2	69	200
EW140T	430	320	56	65	457	200	270	2 1/8	4	2	6	1&1/2	76	260
EW160T	480	320	56	65	457	200	270	2 1/8	4	2	6	1&1/2	87	238
EW180T	535	320	61	65	508	200	270	2 1/8	4	2 1/2	6	1&1/2	94	318
EW210T	660	320	61	65	508	200	270	2 1/8	4	2 1/2	8	1&1/2	115	265

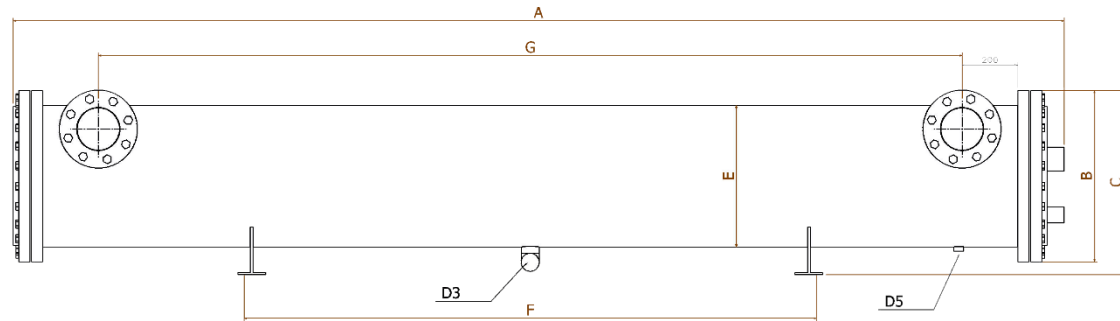

Water.T	12 °C	7 °C
EVA.T	5 °C	
Fouling	0.000043 m2k/w	
velocity	1.3 ~ 3 m/s	
Testing pressure	290 psi	20 bar
Vm	shell volume	حجم خالص پوسته
Q	Water Flow rate	دبی آب
D5	connections	اتصالات



SANAT TABADOL SARD.co

www.tabadolsard.com

